



### SORAA VIVID™

Soraa VIVID lamps offer beautiful and accurate color and white rendering across the entire visible spectrum, mimicking the natural range of sunlight to deliver unmatched quality of light for color critical applications.

### POINT SOURCE OPTICS™

Point Source Optics deliver exceptional beam quality with crisp shadows, perfect uniformity and precisely controlled beam distributions from 9° to 60°.

### SORAA VIVID COLOR™

Soraa VIVID lamps utilize full spectrum light to provide industry-leading color rendition of CRI/95, R9/95, Rf/90, Rg/100 for precise color reproduction.

### SORAA NATURAL WHITE™

Soraa VIVID lamps are engineered to deliver outstanding whiteness rendering for true-to-life whites, which matches or exceeds incandescent sources at 2700K and 3000K.

### ACCESSORIES

Narrow spot compatible with the Soraa SNAP SYSTEM

### GENERAL SPECIFICATIONS

#### Form Factor

Width: 96mm (3.78")

Height: 113mm (4.45")

Weight: 295g

#### Operating Temperature

Minimum: -40°C (ambient)

Typical: 70°C - 80°C (base)

Maximum: 90°C (base)

#### Electrical

Wattage: 18.5W

Power factor: 0.95

Voltage: 100V +/- 10V

Frequency: 50/60Hz

#### Dimming

Please reference our compatibility chart for dimmer and transformer information.

Output	930 - 1000 lumen
Beam Angle	9°, 25°, 36°, 60°
Color Temperature	2700K, 3000K
Color Metrics	CIE Metrics: CRI 95, R9 95 TM30 Metrics: Rf 90, Rg 100 Whiteness Index: Rw 100
Applications	Hotels & Hospitality Galleries & Museums High-End Retail



### ENERGY EFFICIENCY

85% more energy efficient than standard halogen lamps, with typical payback of one year or less.

### THERMAL COMPATIBILITY

Suitable for use with standard fixtures, subject to the maximum heatsink temperature limits stated in this data sheet. Designed to safely turn down in high temperature environments to protect LED and components.

### ELECTRICAL COMPATIBILITY

Works with trailing edge and leading edge phase cut dimmers. Check individual lamp website pages for compatibility data. For more information visit: [www.soraa.com](http://www.soraa.com).

### INTENDED USE & LOCATION RATING

Intended for use in PAR30L compatible recessed downlights, track lighting and other indoor and outdoor applications. Suitable for damp locations, not rated for use in wet locations.

### LIFETIME & WARRANTY

Rated lifetime to L70: 35,000hrs

Warranty: 3yrs or 25,000hrs whichever comes first


For warranty information visit: [www.soraa.com/resources/legal](http://www.soraa.com/resources/legal)




**RoHS**



## DIMENSIONS

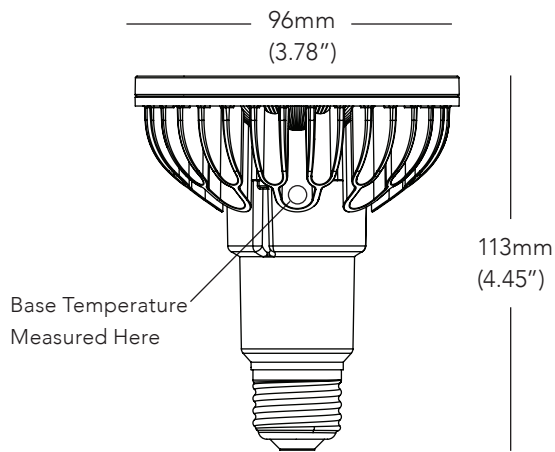


## COLOR RENDERING

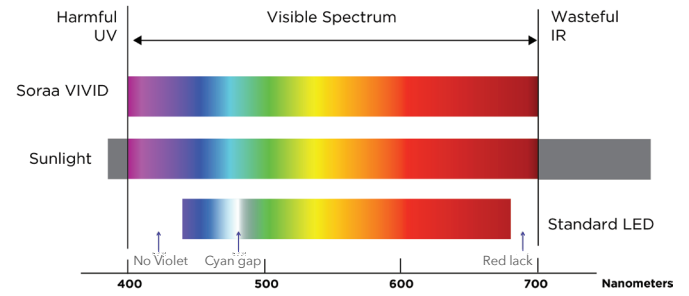

### 9 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
0.5	0.8	8.6%
0.9	1.7	2.5%
1.4	2.5	1.2%
1.9	3.4	0.7%
2.4	4.2	0.4%

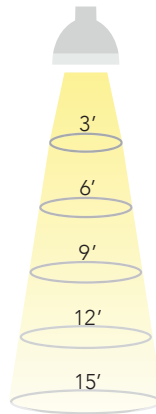


### 25 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
1.3	2.2	8.6%
2.7	4.4	2.5%
4.0	6.6	1.2%
5.3	8.7	0.7%
6.7	10.9	0.4%

### 60 DEGREE BEAM

### 36 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
1.9	3.5	8.6%
3.9	6.9	2.5%
5.8	10.4	1.2%
7.8	13.9	0.7%
9.7	17.3	0.4%

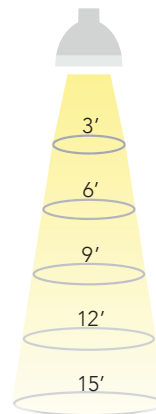

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
3.5	6.0	8.6%
6.9	12.0	2.5%
10.4	18.0	1.2%
13.9	24.0	0.7%
17.3	30.0	0.4%

Note: Footcandles may be calculated by multiplying the CBCP of the desired model number by the percentage in the tables above

**SPECIFICATIONS BY MODEL NUMBER\* SORAA LED PAR30L 18.5W 120V**

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	CBCP (Cd)	Total Flux (Lm)	Efficacy (Lm/W)	McA	SNAP
<b>VIVID SERIES</b>									
SP30L-18-09D-927-03-S5	02847	2700K	9	-	17200	930	50.3	3	YES
SP30L-18-25D-927-03-S5	02849	2700K	25	-	5020	930	50.3	3	-
SP30L-18-36D-927-03-S5	02851	2700K	36	-	2320	930	50.3	3	-
SP30L-18-60D-927-03-S5	02853	2700K	60	-	1020	930	50.3	3	-
SP30L-18-09D-930-03-S5	02855	3000K	9	-	18500	1000	54.1	3	YES
SP30L-18-25D-930-03-S5	02857	3000K	25	-	5400	1000	54.1	3	-
SP30L-18-36D-930-03-S5	02859	3000K	36	-	2500	1000	54.1	3	-
SP30L-18-60D-930-03-S5	02861	3000K	60	-	1100	1000	54.1	3	-

**CCT:** Correlated Color Temperature **McA:** White Point Accuracy in McA step **SNAP:** SORAA SNAP System Compatible




\*Specifications are at stable warm operating conditions (25°C ambient)

**CCT**

**SPECTRAL POWER DISTRIBUTION**

**COLOR QUALITY METRICS**

**COLOR ACCURACY**

<p><b>VIVID 2700K</b></p>	 <p><b>CRI: 95, R9: 95</b></p>	<p><b>CRI</b> 95</p> <p><b>R9</b> 95</p> <p><b>Rf</b> 95</p> <p><b>Rg</b> 100</p> <p><b>Rf-h1</b> 95</p> <p><b>Rw</b> 90</p>	
<p><b>VIVID 3000K</b></p>	 <p><b>CRI: 95, R9: 95</b></p>	<p><b>CRI</b> 95</p> <p><b>R9</b> 95</p> <p><b>Rf</b> 95</p> <p><b>Rg</b> 100</p> <p><b>Rf-h1</b> 95</p> <p><b>Rw</b> 90</p>	