



# PAR36 6W

<b>OUTPUT RANGE: VIVID SERIES</b>	275 - 300 lumen
<b>OUTPUT RANGE: BRILLIANT SERIES</b>	355 - 380 lumen
<b>BEAM ANGLE RANGE</b>	4°
<b>COLOR TEMPERATURE RANGE</b>	2700K, 3000K
<b>APPLICATION</b>	Halogen replacement for indoor & outdoor applications



## POINT SOURCE OPTICS

Exceptional beam control enables unique 4° narrow spot and smooth uniform beams

Single light source, single crisp shadow

## VP<sub>3</sub> VIVID COLOR AND VP<sub>3</sub> NATURAL WHITE

VIVID series provides accurate color rendering across the visible spectrum from 400nm to 700nm, with CRI/95, R9/95, Rf/90, Rg/100

Whiteness rendering matches or exceeds that of halogen and incandescent sources at 2700K and 3000K

## ENERGY EFFICIENCY AND LONG LIFE

85% more energy efficient than standard halogen lamps

Typical payback of one year or less

Rated lifetime to L70: 35,000hrs

Warranty: 3yrs or 25,000hrs whichever comes first

Detailed warranty information available at [soraa.com/resources/legal](http://soraa.com/resources/legal)

## CERTIFICATIONS

UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE



## HIGHLY COMPATIBLE

Narrow spot compatible with Soraa SNAP System accessories

Thermally and geometrically compatible with standard fixtures and suitable for damp locations

Suitable for fully enclosed fixtures. Can be used with front glass cover

Works with trailing edge and leading edge phase cut dimmers, 12V AC magnetic and electronic transformers and 12V DC transformers (see [www.soraa.com/resources](http://www.soraa.com/resources))

## INTENDED USE AND APPLICATIONS

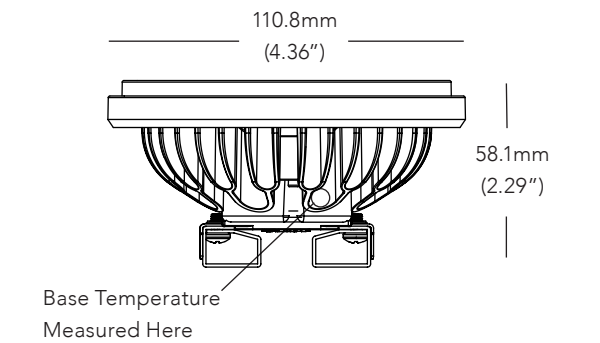
Intended for use in PAR36 compatible recessed downlights, track lighting and other indoor and outdoor applications

Soraa lamps are designed to safely turn down in any thermal environment not conducive to minimum airflow or proper ventilation

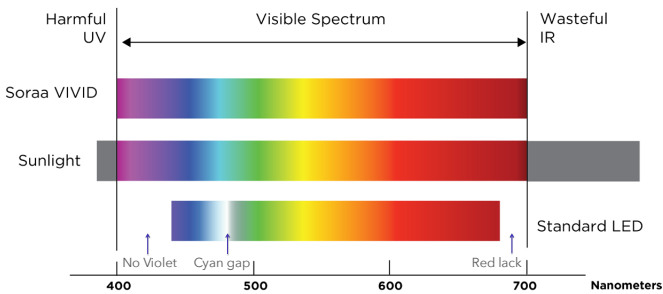
## GENERAL SPECIFICATIONS

Form Factor	Operating Temperature	Electrical	Dimming and Flicker
Width: 110.8mm (4.36")	Minimum: -40°C (ambient)	Wattage: 6W	Dimmable to <20%
Height: 58.1mm (2.29")	Typical: 50°C - 60°C (base)	Power factor: 0.92	Flicker Index <0.06
Weight: 280g	Maximum: 65°C (base)	Voltage: 12V +/- 1.2V	Percent Flicker: 22%
		Frequency: 50/60Hz	

DIMENSIONS

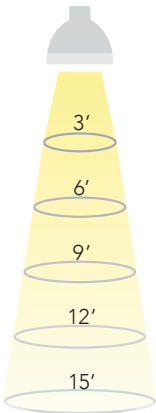


COLOR RENDERING



4 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
0.2	0.5	6.8%
0.4	0.9	2.3%
0.6	1.4	1.1%
0.8	1.9	0.7%
1.0	2.4	0.4%









Note: Footcandles may be calculated by multiplying the CBCP of the desired model number by the percentage in the tables above

SPECIFICATIONS BY MODEL NUMBER\* SORAA LED PAR36 6W

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	CBCP (Cd)	Halogen Equivalent	Total Flux (Lm)	Efficacy (Lm/W)	McA	SNAP
VIVID SERIES										
SP36-06-04D-927-03	03553	2700	4	9	11540	50	275	45	3	YES
SP36-06-04D-930-03	03555	3000	4	9	12600	50	300	50	3	YES
BRILLIANT SERIES										
SP36-06-04D-827-03	03549	2700	4	9	14900	60	355	59	3	YES
SP36-06-04D-830-03	03551	3000	4	9	15960	60	380	63	3	YES

CCT: Correlated Color Temperature    **McA**: White Point Accuracy in McA step    **SNAP**: SORAA SNAP System Compatible

\*Specifications are at stable warm operating conditions (25°C ambient)







SERIES/CCT	COLOR ACCURACY	WHITENESS INDEX	SPECTRAL POWER DISTRIBUTION
<b>VIVID 2700K</b>	 <p>Rf: 90, Rg: 100, Rfh1: 95</p>	 <p>Rw: 120</p>	 <p>380 Wavelength (nm) 780</p> <p>CRI: 95, R9: 95</p>
<b>VIVID 3000K</b>	 <p>Rf: 90, Rg: 100, Rfh1: 95</p>	 <p>Rw: 120</p>	 <p>380 Wavelength (nm) 780</p> <p>CRI: 95, R9: 95</p>

# SERIES/CCT

# COLOR ACCURACY

# WHITENESS INDEX

# SPECTRAL POWER DISTRIBUTION

<p><b>BRILLIANT 2700K</b></p>	 <p><b>Rf: 85, Rg: 92, Rfh1: 77</b></p>	 <p><b>Rw: 100</b></p>	 <p><b>CRI: 85, R9: &gt;0</b></p>
<p><b>BRILLIANT 3000K</b></p>	 <p><b>Rf: 85, Rg: 92, Rfh1: 77</b></p>	 <p><b>Rw: 100</b></p>	 <p><b>CRI: 85, R9: &gt;0</b></p>

**Rf:** TM-30 metric measuring color fidelity (whether colors are similar to those under natural light). Rf is a more accurate version of the CRI Ra. Rf is 100 for natural light.  
**Rg:** TM-30 metric measuring color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.  
**Rfh1:** TM-30 metric measuring color fidelity for red tones. Rfh1 is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.  
**Rw:** Soraal-developed metric to measure white fidelity. Rw measures the magnitude of excitation of whitening agents within whites. Rw is about 100 for natural light.