



- Read all instructions carefully before installing.
- Installation must be performed by a qualified person
- Ensure that power is off on the main panel before starting installation or performing any maintenance.
- Do not install any fixture closer than 20cm from any curtain or combustible material.
- Make sure all screws are properly tightened.
- The light source contained in this luminaire shall only be replaced by the manufacturer or their service agent or a similar qualified person.


YOU WILL NEED:

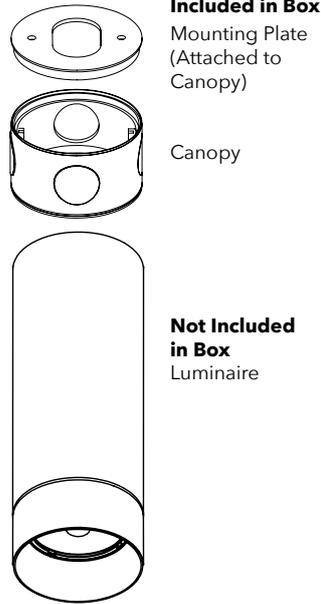


Step 1. Unscrew Mounting Plate from canopy and attach to ceiling (Fig. 1).

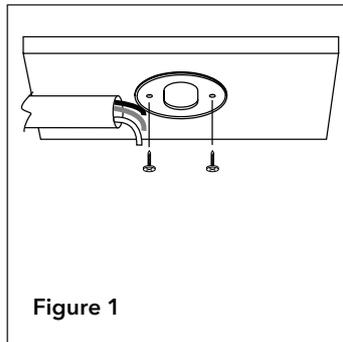


Step 2. A: Remove lower ring of canopy by turning counter clockwise. Set aside for installation in Step 5. B: remove knock out for conduit opening (Fig. 2).

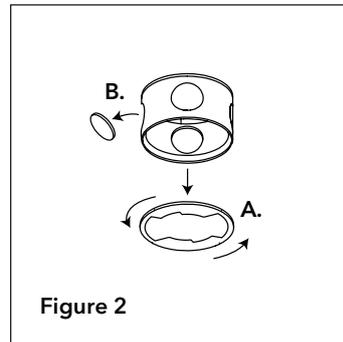


Step 3. Attach canopy to mounting plate by screwing in clockwise, making sure conduit opening aligns with conduit (Fig. 3).

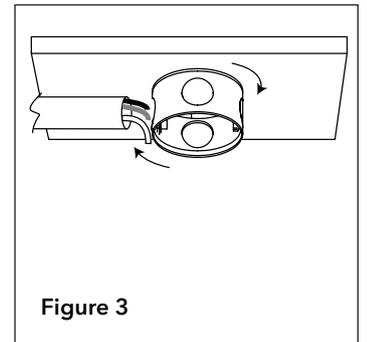


Step 4. Install conduit into canopy and fasten with conduit hardware (by others) (Fig. 4)

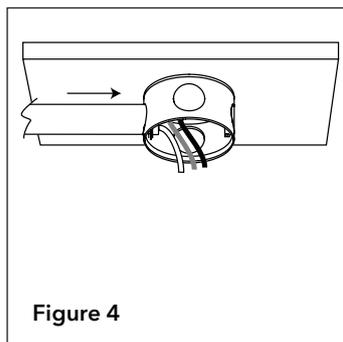


Step 5. Pass wires from conduit through canopy and connect to luminaire, following Wire Connections table (Fig. 5).

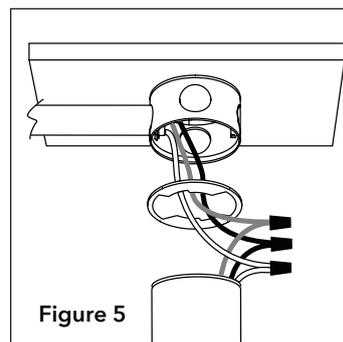

Step 6. Reinstall bottom ring of canopy by screwing clockwise (Fig. 7).

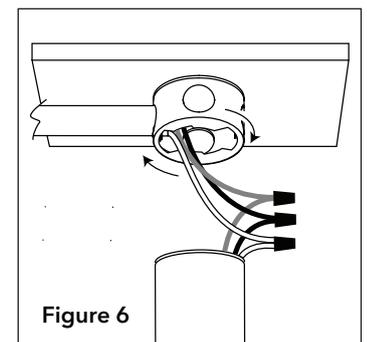

Step 7. Conceal wires in canopy. Screw luminaire into canopy by turning clockwise (Fig. 7).



Wire Connections

| From Ceiling | From Luminaire |
|--------------------|------------------------|
| Brown | > Brown |
| Blue | > Blue |
| Green/Yellow | > Green/Yellow |
| Violet (+) | > Violet or Yellow (+) |
| Yellow or Gray (-) | > Gray (-) |